

PEACEMAKER® CONVERTING SCRUBBER MODEL SPECIFICATIONS SUMMARY


MODELS	2x2	2.5x2.5	3x3	4x4	5x5	6x6	8x5	10x5	10x7	
Vessel (Black/White HDPE) SG	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	
Cover (Black/White ABS) (")	3/16	3/16	1/4	1/4	1/4	1/4	1/4	1/4	1/4	
Influent Coupling (Foul air intake) (")	2	2	4	4	6	8	8	12	12	
Lower air diffuser (perforated ABS) (")	3/16	1/4	1/4	¼						
Lower air diffuser (perforated HDPE)						1/4 W' Coated steel support system				
<i>For total height, see Blower Specifications Form for height of recommended blower and add to height of scrubber</i>										
Height (")	33-3/4	39-3/4	46-1/2	55-1/2	64-1/2	74-1/2	71-1/2	72-1/2	95-1/4	
Diameter (")	24	30	36	48	61	73	96	120	120	
Media (maximum Cu-Ft)	6	12	20	48	73	122	193	260	410	
Foot Print (")	30x36	36x36	36x42	48x54	61x67	73x79	96x102	120x126	120x126	
Blower	AO-70	AO-70	VBL6	VBW6	VBW6	VBW6	VBL9	VBL9	NY Blower	
Charged Weight (lbs.)	375	700	1,135	2,435	4,315	7,020	11,305	15,305	20,500	
Airflow (maximum CFM)	30	60	85	200	335	540	860	1,150	1,750	

Scrubber Size is determined by PPM of H₂S and CFM


Storage and Use: Store and use away from acids and reducing agents. Do not add any chemicals to the scrubber other than those recommended by the manufacturer.

Individual Specification Sheets are available on each model. Drawings below are representative. See Specifications for actual dimensions. Passive (no fan) units are available, and are used mainly on air relief valves. Syneco Systems reserves the right to change specifications without prior notice. In no case shall such changes have an adverse effect on the performance of the product.

SINGLE SCRUBBER

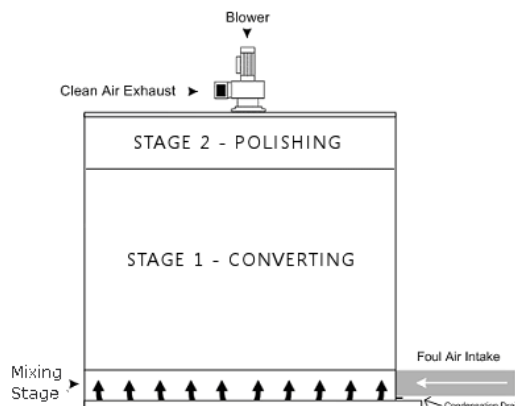

SCRUBBERS IN SERIES

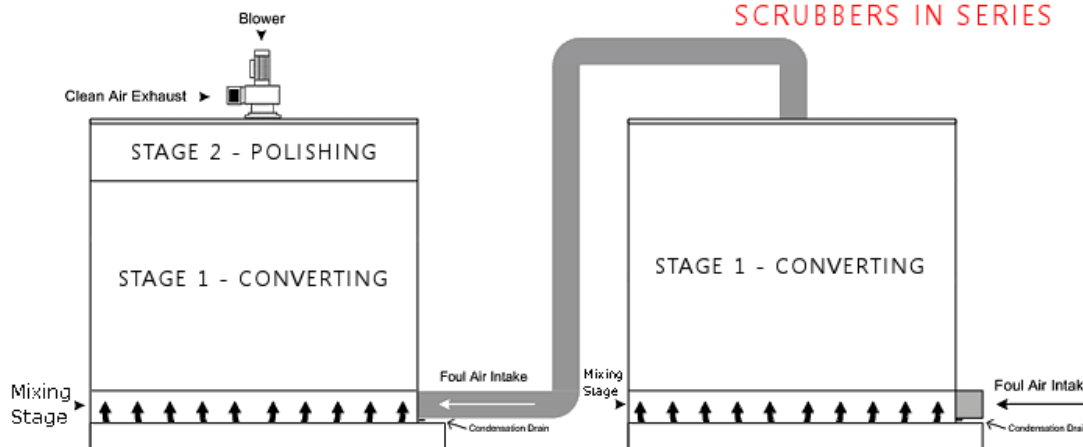

Limited Warranty: Our only obligation shall be to replace or pay for any material proved defective. Beyond the purchase price of materials supplied by us, we assume no liability for damages of any kind and the user accepts the product "as is" and without warranties, expressed or implied. The suitability of the product for an intended use shall be solely up to the user.