


**INSTALLATION & OPERATION OF THE
 PEACEMAKER® H2S Converting/Polishing DRY AIR SCRUBBER –
 (All Models)**

| | |
|---------|---|
| Step 1. | Do not remove the PEACEMAKER® from the pallet. Place the entire assembly on a firm base. |
| Step 2. | Remove and save the cap from the foul-air intake. Install gate valve/blast gate if required, and connect into malodor source. |
| Step 3. | Connect exhaust stack. (If scrubber is in an enclosed building, continue stack through wall or roof.) |
| Step 4. | Install fan and connect it to the electrical power according to specifications and your local regulations. Switch on. |
| Step 5. | Remove/save the plug from the condensate line and install a drain line. |

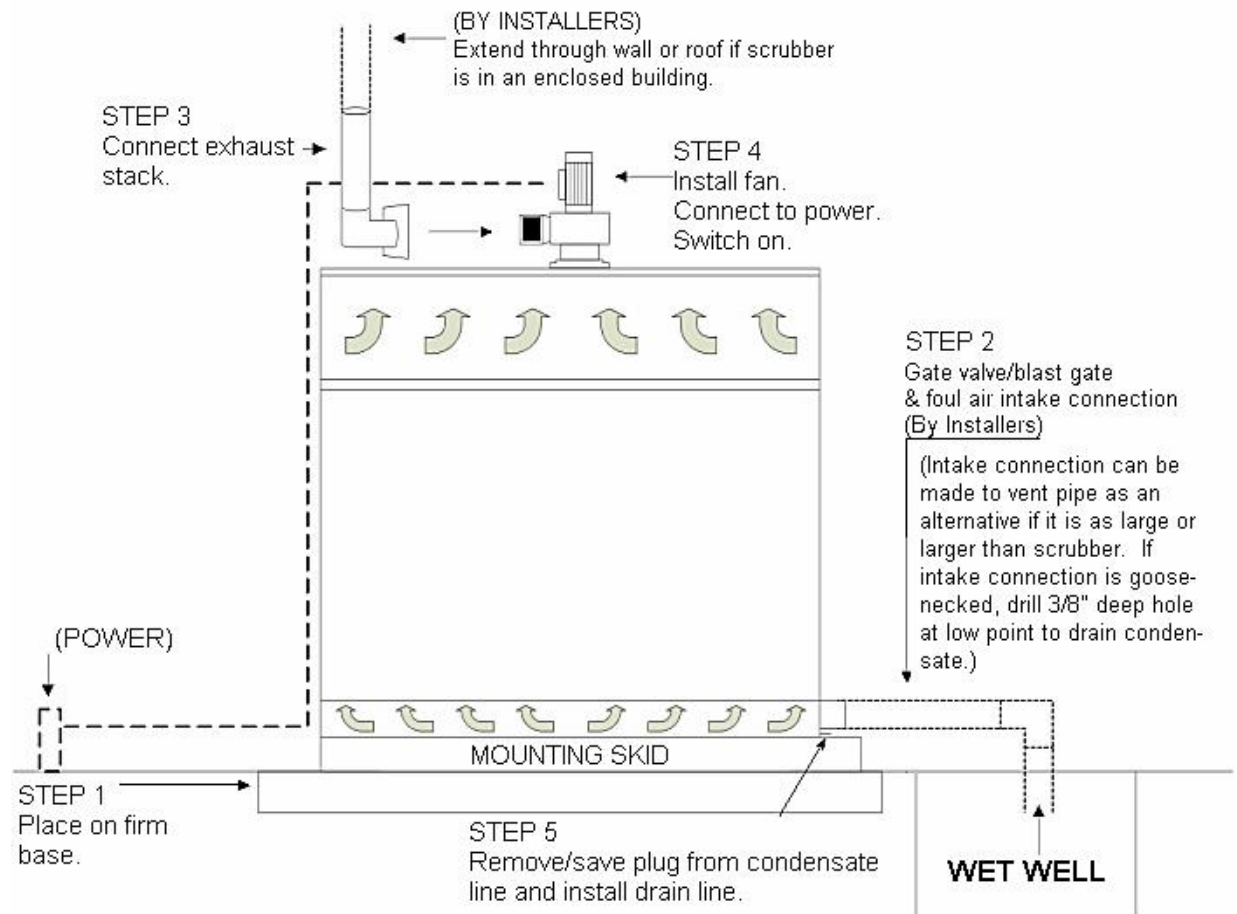

| DISCONNECT & RETURN | |
|---------------------|--|
| Step 1. | Disconnect the power supply. |
| Step 2. | Disconnect the PVC pipes leading to the scrubber and reinstall the intake cap and condensate plug that were removed during installation. |
| Step 3. | To arrange for pick-up, call Syneco Systems, Inc. at 952-927-9215. |