


PEACEMAKER® OXIDIZING SCRUBBER MODEL SPECIFICATIONS SUMMARY


MODELS	2x2	2.5x2.5	3x3	4x4	5x5	6x5	8x5	10x5	10x7
Vessels (black/white HDPE) SG	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9
Cover (Black/White ABS or HDPE)	3/16"	3/16"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"
Influent Coupling (Foul air intake)	4"	4"	6"	8"	12"	16"	16"	24"	24"
Lower air diffuser (perforated ABS)	3/16"	1/4"	1/4"	1/4"					
Lower air diffuser (perforated HDPE)					1/4" W' Coated steel support system				
<i>For total height, see Blower Specific Specifications for height of recommended blower and add to height of scrubber</i>									
Height	33-3/4"	39-3/4"	46-1/2"	55-1/2"	76"	77"	80"	68"	92"
Diameter	24"	30"	36"	48"	60"	72"	96"	120"	120"
Media (maximum)	6 Cu-Ft	12 Cu-Ft	20 Cu-Ft	48 Cu-Ft	63 Cu-Ft	86 Cu-Ft	151 Cu-Ft	183 Cu-Ft	332 Cu-Ft
Foot Print	30"x36"	36"x36"	36"x42"	48"x54"	61"x67"	73"x79"	96"x102"	120"x126"	120"x126"
Fan	VBL-6	VBW-6	VBW-6	VBW-9	VBW-9	Chicago	Chicago	Chicago	Chicago
Charged Weight	375 lbs.	700 lbs.	1,120 lbs.	2,600 lbs.	3,725 lbs.	5,350 lbs.	9,105 lbs.	11,255 lbs.	18,745 lbs.
Airflow (maximum)	150 CFM	325 CFM	500 CFM	1,150 CFM	1,750 CFM	2,750 CFM	4,250 CFM	6,000 CFM	9,000 CFM
Scrubber Size is determined by PPM of H₂S and CFM									
Storage and Use: Store and use away from acids and reducing agents. Do not add any chemicals to the scrubber other than those recommended by the manufacturer.									

Individual Specification Sheets are available on each model. Drawings below are representative. See Specifications for actual dimensions. Passive (no fan) units are available, and are used mainly on air relief valves. Syneco Systems reserves the right to change specifications without prior notice. In no case shall such changes have an adverse effect on the performance of the product.

SINGLE SCRUBBER

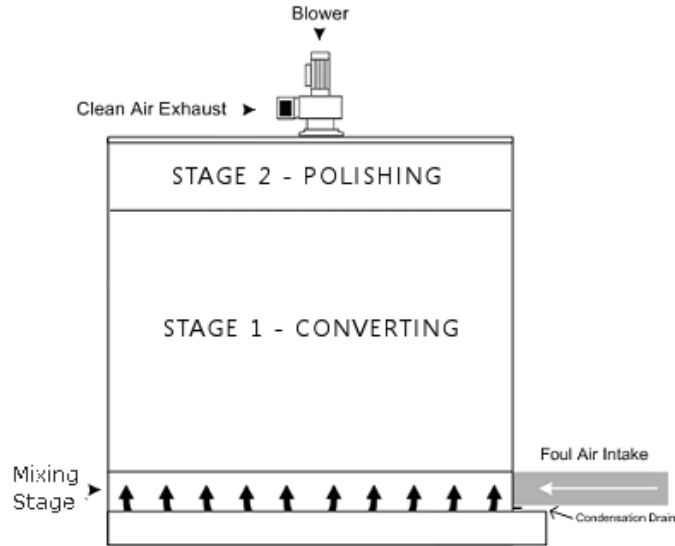

SCRUBBERS IN PARALLEL
 Top View

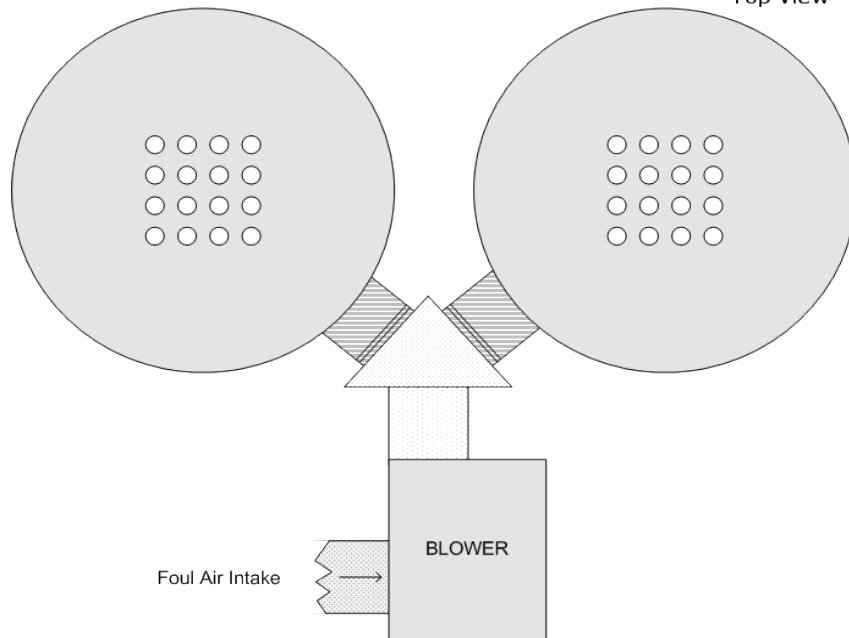

Limited Warranty:

Our only obligation shall be to replace or pay for any material proved defective. Beyond the purchase price of materials supplied by us, we assume no liability for damages of any kind and the user accepts the product “as is” and without warranties, expressed or implied. The suitability of the product for an intended use shall be solely up to the user.